

Chapter 32

Traffic data collection

32.1 Overview

Unlike many other disciplines of the engineering, the situations that are interesting to a traffic engineer cannot be reproduced in a laboratory. Even if road and vehicles could be set up in large laboratories, it is impossible to simulate the behaviour of drivers in the laboratory. Therefore, traffic stream characteristics need to be collected only from the field. There are several methods of data collection depending on the need of the study and some important ones are described in this chapter.

32.2 Data requirements

The most important traffic characteristics to be collected from the field includes speed, travel time, flow and density. Some cases, spacing and headway are directly measured. In addition, the occupancy, ie percentage of time a point on the road is occupied by vehicles is also of interest.

The measurement procedures can be classified based on the geographical extent of the survey into five categories: (a) measurement at point on the road, (b) measurement over a short section of the road (less than 500 metres) (c) measurement over a length of the road (more than about 500 metres) (d) wide area samples obtained from number of locations, and (e) the use of an observer moving in the traffic stream. In each category, numerous data collection are there. However, important and basic methods will be discussed.

32.2.1 Measurements at a point

The most important point measurement is the vehicle volume count. Data can be collected manually or automatically. In manual method, the observer will stand at the point of interest and count the vehicles with the help of hand tallies. Normally, data will be collected for short interval of 5 minutes or 15 minutes etc. and for each types of vehicles like cars, two wheelers, three wheelers, LCV, HCV, multi axle trucks, nonmotorised traffic like bullock cart, hand cart etc. From the flow data, flow and headway can be derived.

Modern methods include the use of inductive loop detector, video camera, and many other technologies. These methods helps to collect accurate information for long duration. In video cameras, data is collected from the field and is then analysed in the lab for obtaining results. Radars and microwave detectors are used to obtain the speed of a vehicle at a point. Since no length is involved, density cannot be obtained by measuring at a point.

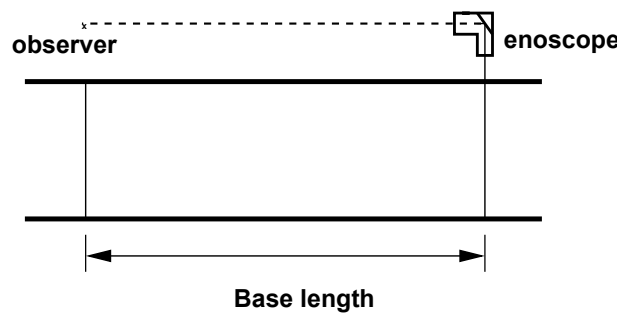


Figure 32:1: Illustration of measurement over short section using enoscope

32.2.2 Measurements over short section

The main objective of this study is to find the spot speed of vehicles. Manual methods include the use of enoscope. In this method a base length of about 30-90 metres is marked on the road. Enoscope is placed at one end and observer will stand at the other end. He could see the vehicle passing the farther end through enoscope and starts the stop watch. Then he stops the stop watch when the vehicle passes in front of him. The working of the enoscope is shown in figure 32:1.

An alternative method is to use pressure contact tube which gives a pressure signal when vehicle moves at either end. Another most widely used method is inductive loop detector which works on the principle of magnetic inductance. Road will be cut and a small magnetic loop is placed. When the metallic content in the vehicle passes over it, a signal will be generated and the count of the vehicle can be found automatically. The advantage of this detector is that the counts can be obtained throughout the life time of the road. However, chances of errors are possible because noise signals may be generated due to heavy vehicle passing adjacent lanes. When dual loops are used and if the spacing between them is known then speed also can be calculated in addition to the vehicle cost.

32.2.3 Measurements over long section

This is normally used to obtain variations in speed over a stretch of road. Usually the stretch will be having a length more than 500 metres. We can also get density. Most traditional method uses aerial photography. From a single frame, density can be measured, but not speed or volumes. In time lapse photography, several frames are available. If several frames are obtained over short time intervals, speeds can be measured from the distance covered between the two frames and time interval between them.

32.2.4 Moving observer method for stream measurement

Determination of any of the two parameters of the traffic flow will provide the third one by the equation $q = u.k$. Moving observer method is the most commonly used method to get the relationship between the fundamental stream characteristics. In this method, the observer moves in the traffic stream unlike all other previous methods.

Consider a stream of vehicles moving in the north bound direction. Two different cases of motion can be considered. The first case considers the traffic stream to be moving and the observer to be stationary. If n_o is

the number of vehicles overtaking the observer during a period, t , then flow q is $\frac{n_0}{t}$, or

$$n_0 = q \times t \quad (32.1)$$

The second case assumes that the stream is stationary and the observer moves with speed v_o . If n_p is the number of vehicles overtaken by observer over a length l , then by definition, density k is $\frac{n_p}{l}$, or

$$n_p = k \times l \quad (32.2)$$

or

$$n_p = k.v_o.t \quad (32.3)$$

where v_o is the speed of the observer and t is the time taken for the observer to cover the road stretch. Now consider the case when the observer is moving within the stream. In that case m_o vehicles will overtake the observer and m_p vehicles will be overtaken by the observer in the test vehicle. Let the difference m is given by $m_o - m_p$, then from equation 32.10 and equation 32.12,

$$m = q.t - k.v_o.t \quad (32.4)$$

This equation is the basic equation of moving observer method, which relates q, k to the counts m , t and v_o that can be obtained from the test. However, we have two unknowns, q and k , but only one equation. For generating another equation, the test vehicle is run twice once with the traffic stream and another one against traffic stream, i.e.

$$m_w = q.t_w + k.v_w \quad (32.5)$$

$$nonumber = q.t_w + k.l \quad (32.6)$$

$$m_a = q.t_a - k.v_a \quad (32.7)$$

$$nonumber = q.t_a - k.l \quad (32.8)$$

$$(32.9)$$

where, a, w denotes against and with traffic flow. It may be noted that the sign of equation 32.8 is negative, because test vehicle moving in the opposite direction can be considered as a case when the test vehicle is moving in the stream with negative velocity. Further, in this case, all the vehicles will be overtaking, since it is moving with negative speed. In other words, when the test vehicle moves in the opposite direction, the observer simply counts the number of vehicles in the opposite direction. Adding equation 32.6 and 32.8, we will get the first parameter of the stream, namely the flow(q) as:

$$q = \frac{m_w + m_a}{t_w + t_a} \quad (32.10)$$

Now calculating space mean speed from equation 32.6,

$$\begin{aligned} \frac{m_w}{t_w} &= q - k.v_w \\ &= q - \frac{q}{v}v_w \\ &= q - \frac{q}{v} \left[\frac{l}{t_w} \right] \\ &= q \left(1 - \frac{l}{v} \times \frac{1}{t_w} \right) \\ &= q \left(1 - \frac{t_{avg}}{t_w} \right) \end{aligned}$$

If v_s is the mean stream speed, then average travel time is given by $t_{avg} = \frac{l}{v_s}$. Therefore,

$$\begin{aligned}\frac{m_w}{q} &= t_w \left(1 - \frac{t_{avg}}{t_w}\right) = t_w - t_{avg} \\ t_{avg} &= t_w - \frac{m_w}{q} = \frac{l}{v_s},\end{aligned}$$

Rewriting the above equation, we get the second parameter of the traffic flow, namely the mean speed v_s and can be written as,

$$v_s = \frac{l}{t_w - \frac{m_w}{q}} \quad (32.11)$$

Thus two parameters of the stream can be determined. Knowing the two parameters the third parameter of traffic flow density (k) can be found out as

$$k = \frac{q}{v_s} \quad (32.12)$$

For increase accuracy and reliability, the test is performed a number of times and the average results are to be taken.

Example 1

The length of a road stretch used for conducting the moving observer test is 0.5 km and the speed with which the test vehicle moved is 20 km/hr. Given that the number of vehicles encountered in the stream while the test vehicle was moving against the traffic stream is 107, number of vehicles that had overtaken the test vehicle is 10, and the number of vehicles overtaken by the test vehicle is 74, find the flow, density and average speed of the stream.

Solution Time taken by the test vehicle to reach the other end of the stream while it is moving along with the traffic is $t_w = \frac{0.5}{20} = 0.025$ hr Time taken by the observer to reach the other end of the stream while it is moving against the traffic is $t_a = t_w = 0.025$ hr Flow is given by equation 32.10, i.e., $q = \frac{107 + (10 - 74)}{0.025 + 0.025} = 860$ veh/hr Stream speed v_s can be found out from equation 32.11 as $v_s = \frac{0.5}{0.025 - \frac{10.74}{860}} = 5$ km/hr Density can be found out from equation 32.12 as $k = \frac{860}{5} = 172$ veh/km

Example 2

The data from four moving observer test methods are shown in the table. Coulmn 1 gives the sample number, column 2 gives the number of vehicles moving against the stream, column 3 gives the number of vehicles that had overtaken the test vehicle, and last column gives the number of vehicles overtaken by the test vehicle. Find the three fundamental stream parameters for each set of data. Also plot the fundamental diagrams of traffic flow.

Sample no.	1	2	3
1	107	10	74
2	113	25	41
3	30	15	5
4	79	18	9

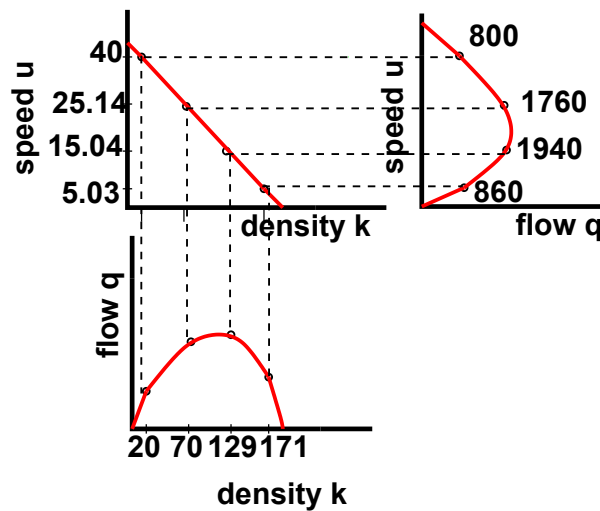


Figure 32:2: Fundamental diagrams of traffic flow

Solution

Sample no.	m_a	m_o	m_p	$m(m_o - m_p)$	t_a	t_w	$q = \frac{m_a + m_w}{t_a + t_w}$	$u = \frac{l}{t_w - \frac{m_a}{q}}$	$k = \frac{q}{v}$
1	107	10	74	-64	0.025	0.025	860	5.03	171
2	113	25	41	-16	0.025	0.025	1940	15.04	129
3	30	15	5	10	0.025	0.025	800	40	20
4	79	18	9	9	0.025	0.025	1760	25.14	70

From the calculated values of flow, density and speed, the three fundamental diagrams can be plotted as shown in figure 32:2.

32.3 Summary

Traffic engineering studies differ from other studies in the fact that they require extensive data from the field which cannot be exactly created in any laboratory. Speed data are collected from measurements at a point or over a short section or over an area. Traffic flow data are collected at a point. Moving observer method is one in which both speed and traffic flow data are obtained by a single experiment.

32.4 Problems